

1/15








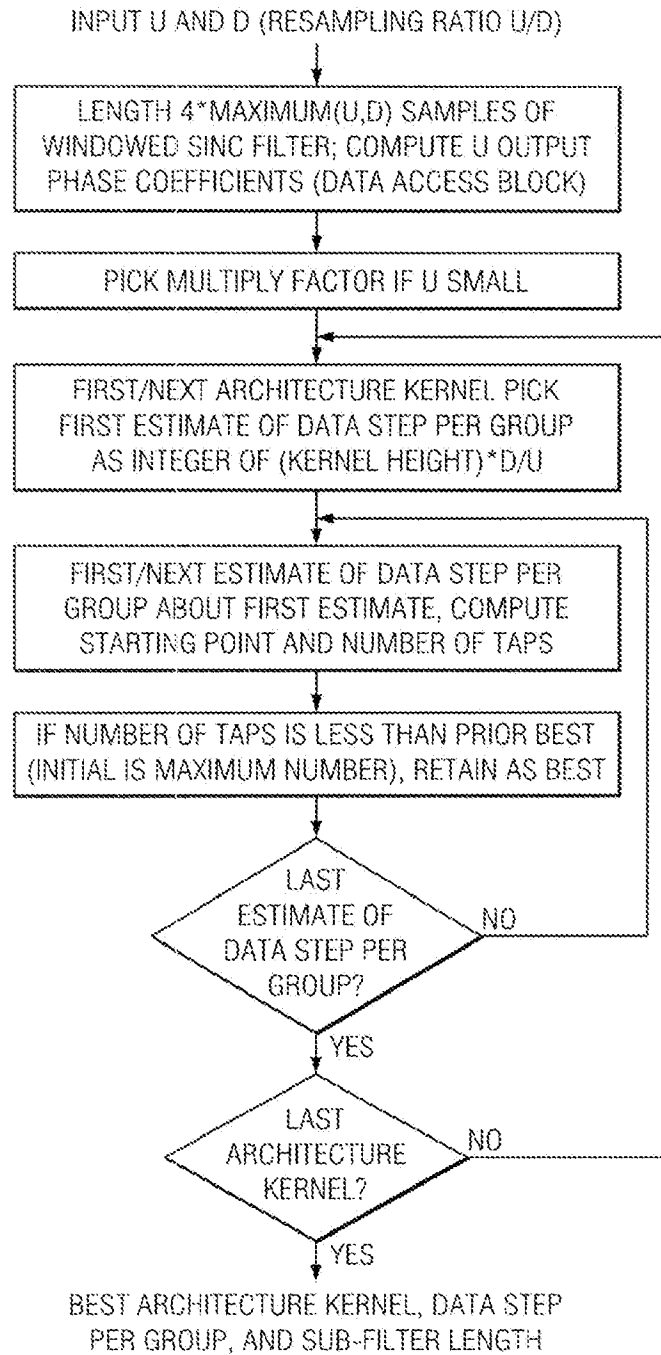


FIG. 1a

2/15

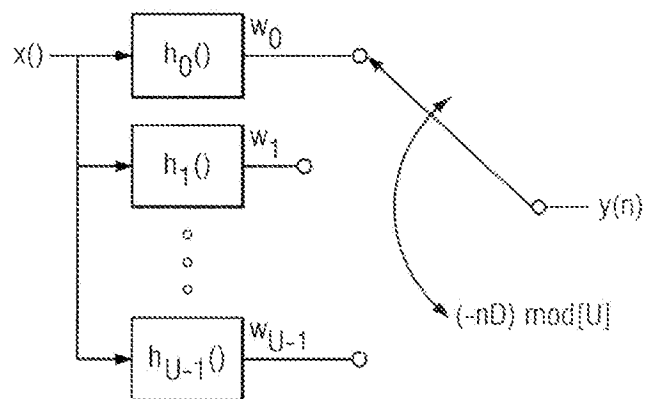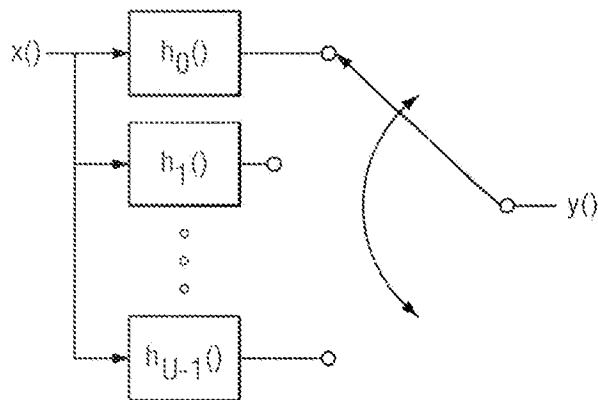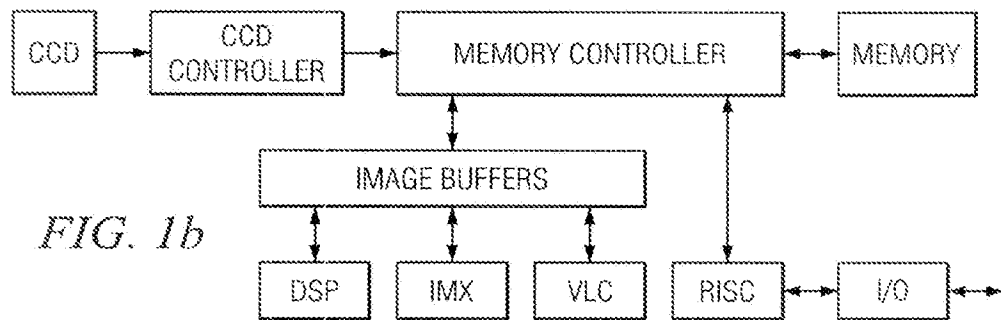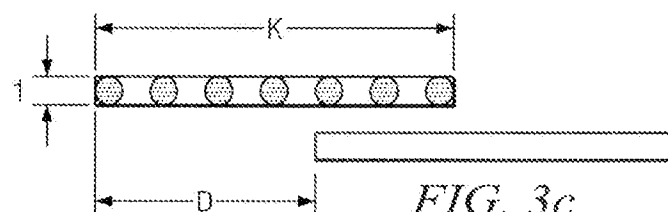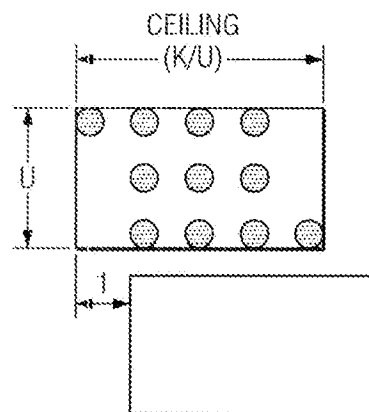

3/15

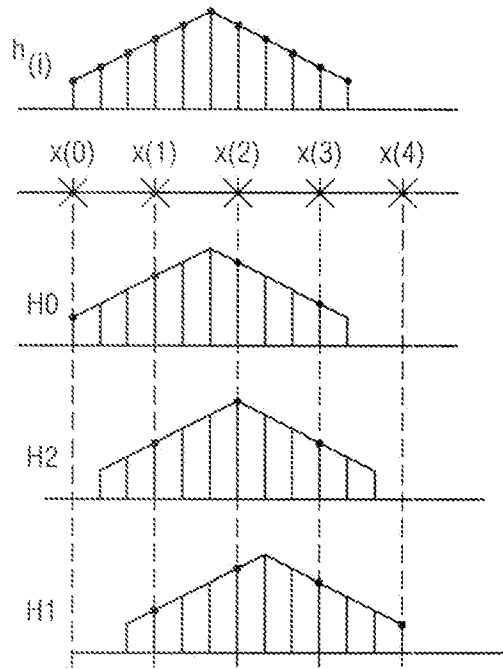

4/15

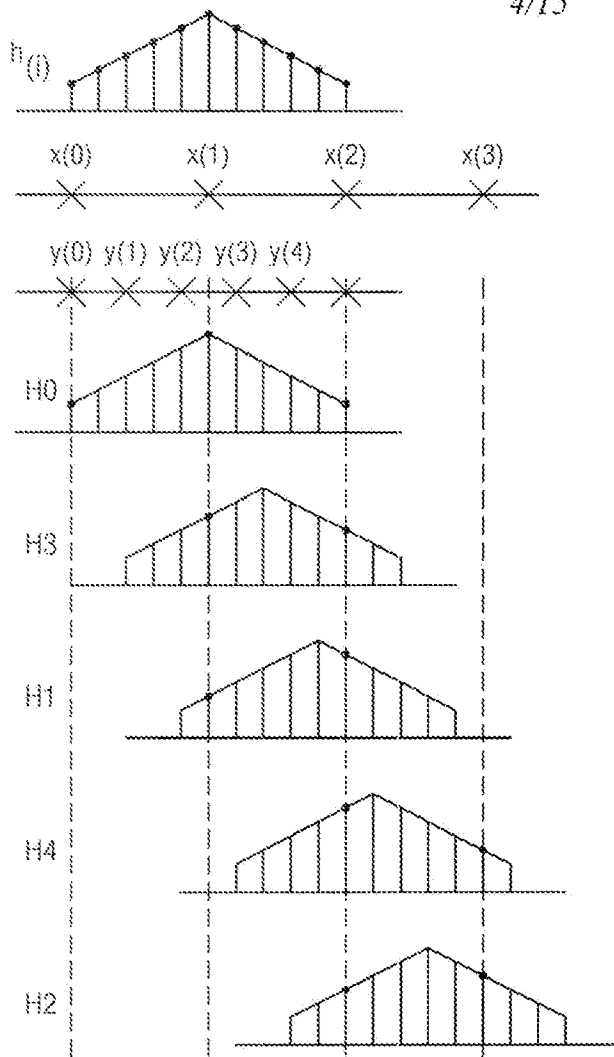


FIG. 4a


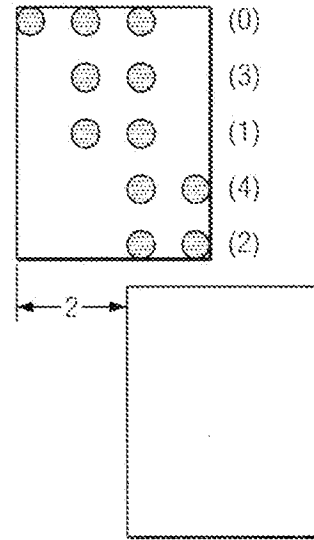

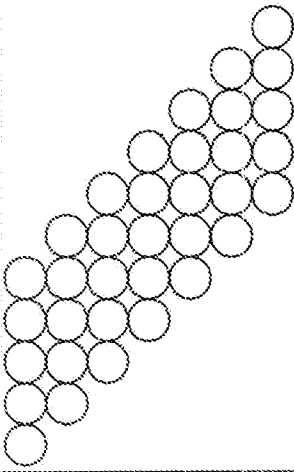

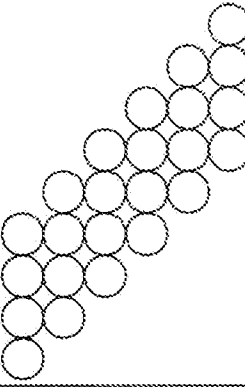


FIG. 4b

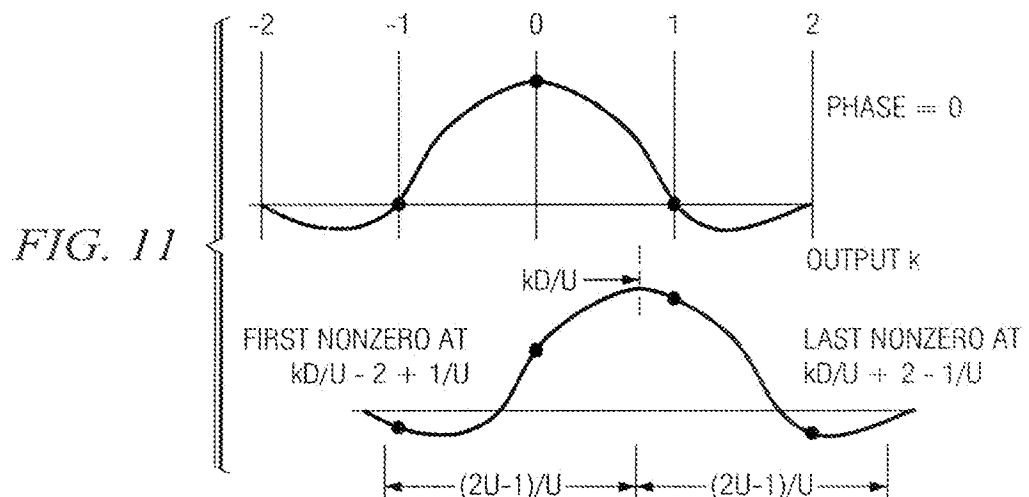

5/15

FIG. 5a


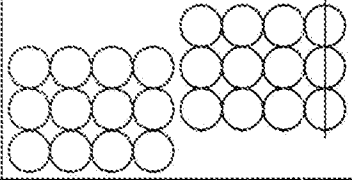

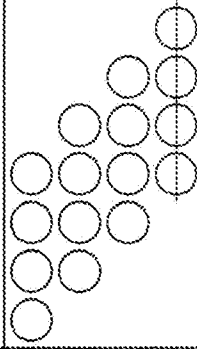

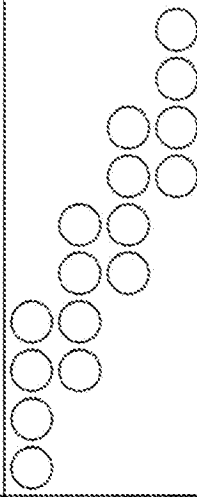
ARCHITECTURE KERNEL	EXPLANATION	EXAMPLE
<p>SINGLE POINT</p> 	<p>SINGLE-THREAD FILTERING, GETTING ONE DATA POINT AT A TIME. THE NEXT ACCESS CAN STAY ON THE SAME POINT, OR MOVE FOR A FIXED DISTANT. THIS IS THE MOST FLEXIBLE PATTERN. HOWEVER, THERE IS USUALLY TIME ASSOCIATED WITH EACH LEVEL OF LOOPING, WHICH IS NEEDED TO IMPLEMENT CHANGING OF STEPPING DISTANCE IN A REGULAR MANNER. A PARALLEL DSP PERFORMING VERTICAL FILTERING OFTEN USE THIS SINGLE-POINT KERNEL, AS ITS PARALLELISM IS APPLIED TO DIFFERENT FILTERING PROBLEMS (FOR VERTICAL FILTERING, EACH COLUMN IS OPERATED INDEPENDENTLY AND IS THUS A SEPARATE PROBLEM)</p>	 <p>THIS IS FOR 5-TAP-PER-OUTPUT FILTERING GOING ON FOR 7 OUTPUTS, FOR ONE DATA ACCESS BLOCK FOR 7/D RESAMPLING</p>
<p>4-WIDE</p> 	<p>DSP WITH FIXED, 4-WIDE, DATA ACCESS, AND CAPABILITY TO COMPUTE INNER-PRODUCT WITH COEFFICIENT ARRAY AND PRODUCING A SINGLE SUM. TO BE EFFICIENT FOR FILTERING, THE STARTING POINT SHOULD BE ON ANY ALIGNMENT</p>	 <p>THIS IS 4-TAP-PER-OUTPUT FILTERING FOR A 6/D RESAMPLING</p>

TO FIG. 5b

6/15

FIG. 5b

FROM FIG. 5a

<p>4-TAIL</p> 	<p>DSP WITH 4 PARALLEL EXECUTION UNITS, AND THEY ARE ALL FED WITH THE SAME SINGLE DATA POINT. THERE IS A SIGNIFICANT DISTINCTION IN DSP ARCHITECTURE THAT AFFECTS HOW WE CAN USE THIS AND MANY OTHER ARCHITECTURE KERNELS: WRITING IN ANY ALIGNMENT, OR WRITING ONLY ON 2^N N-WORD ALIGNMENT. THE FORMER CAN BE USED TO IMPLEMENT ANY U FACTOR. THE LATTER CAN ONLY WORK WITH U BEING MULTIPLE OF 2^N. WHEN U IS NOT A MULTIPLE OF 4, FOR EXAMPLE, WE UPSCALE U AND D SO THAT THEY ARE, AT THE EXPENSE OF EFFICIENCY</p>	 <p>THIS IS A WRITE-ANY-ALIGNMENT ARCHITECTURE IMPLEMENTING A 7/D RESAMPLING WITH 3-TAP-PER-OUTPUT FILTERS. NOTE THAT 8 OUTPUTS ARE COMPUTED AND THEN ONE IS THROWN AWAY</p>
<p>1:1 SLOPE, 4 OUTPUTS</p> 	<p>DSP WITH 4 PARALLEL EXECUTION UNITS, AND THEY ARE FED WITH 4 DATA POINTS, ONE FOR EACH. TO BE EFFICIENT FOR FILTERING, THE 4 INPUTS NEED TO BE ON ANY WORD ALIGNMENT</p>	 <p>THIS IS FOR A 3/D RESAMPLING, WITH 4-TAP-PER-OUTPUT FILTERS. NOTE THAT 4 OUTPUTS ARE COMPUTED AND THEN ONE IS THROWN AWAY</p>
<p>1:2 SLOPE, 2 OUTPUTS</p> 	<p>DSP THAT CAN TAKE IN 4 INPUTS, AND PERFORM $acc_A = acc_A + c0 * d0 + c1 * d1$, $acc_B = acc_B + c2 * d2 + c3 * d3$ TO BE EFFICIENT FOR FILTERING, THE INPUTS NEED TO BE ON ANY WORD ALIGNMENT</p>	 <p>THIS IS FOR A 4/D RESAMPLING, WITH 4-TAP-PER-OUTPUT FILTERS</p>

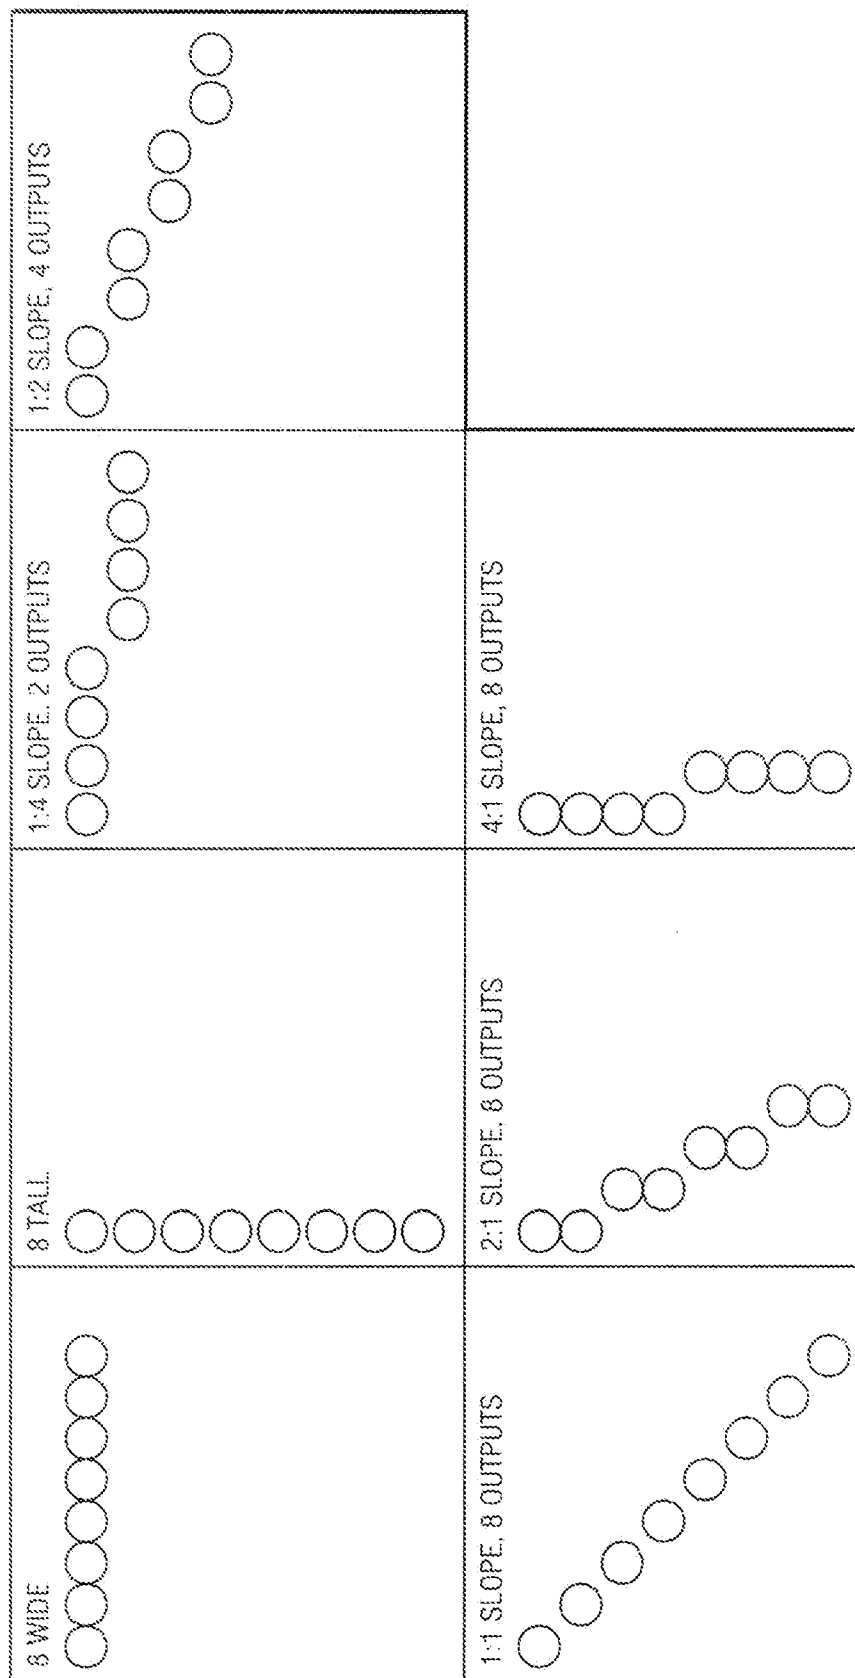


FIG. 6a

8/15

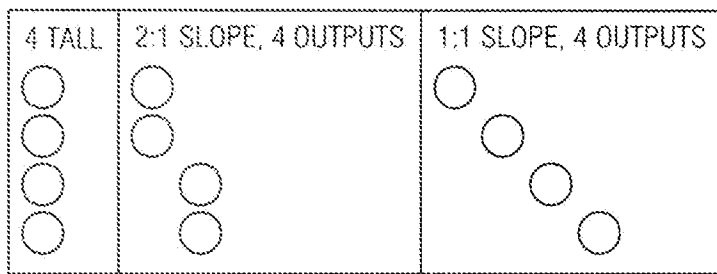


FIG. 6b

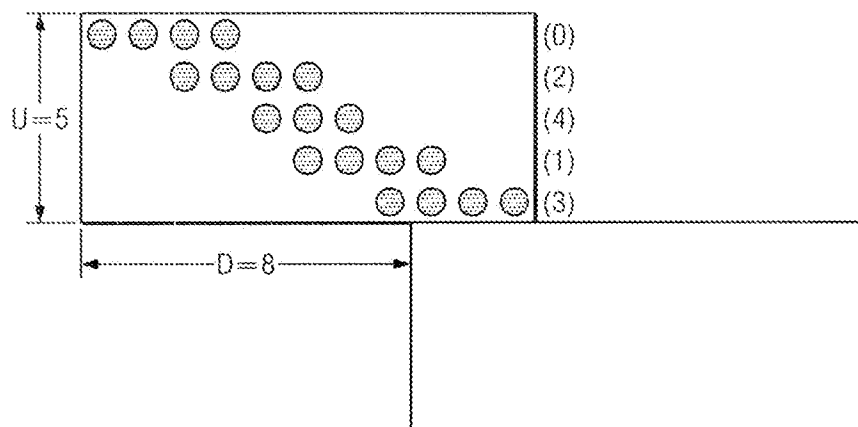


FIG. 7a

FIG. 7b


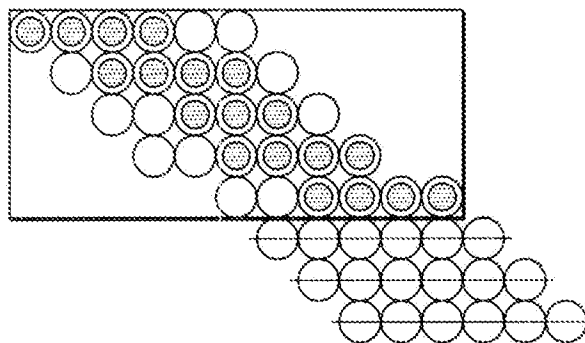


FIG. 7c

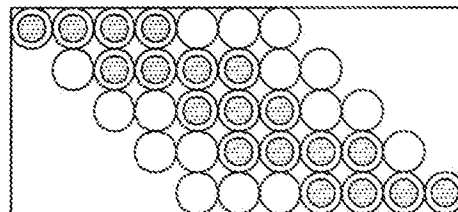

9/15

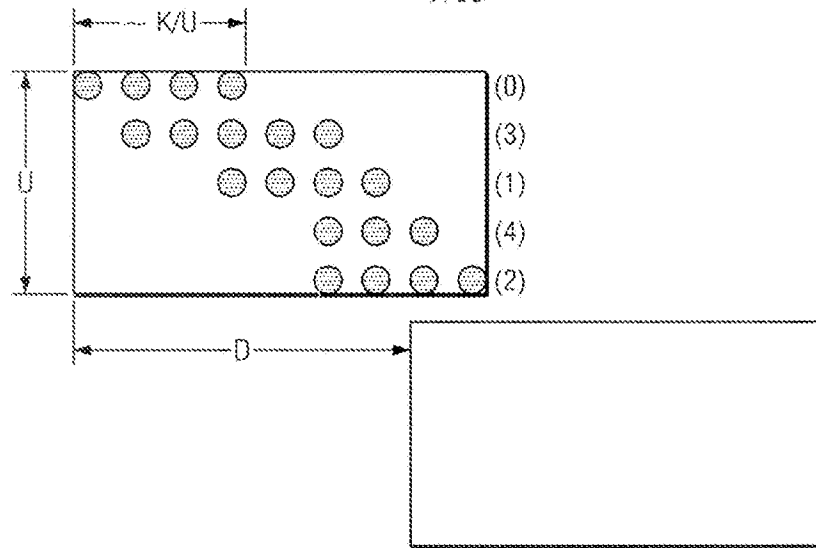


FIG. 8a

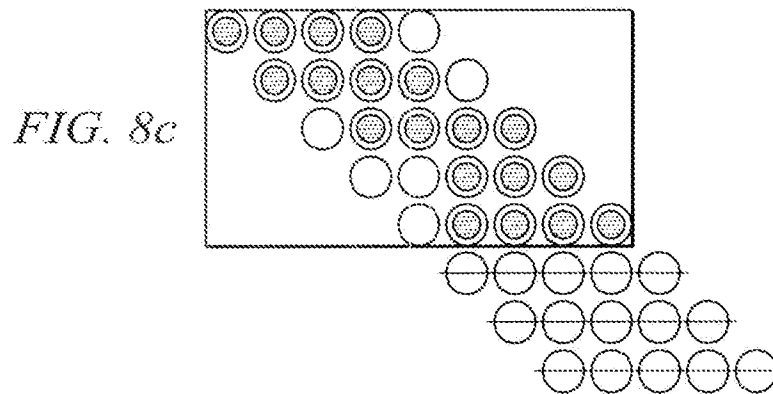


FIG. 8c


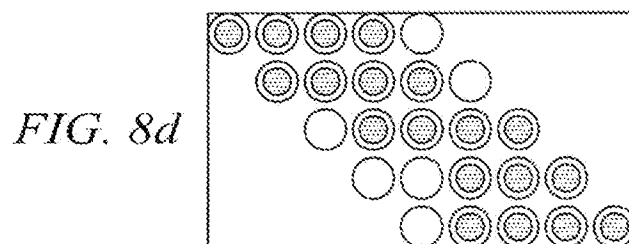


FIG. 8d

10/15

FIG. 8b

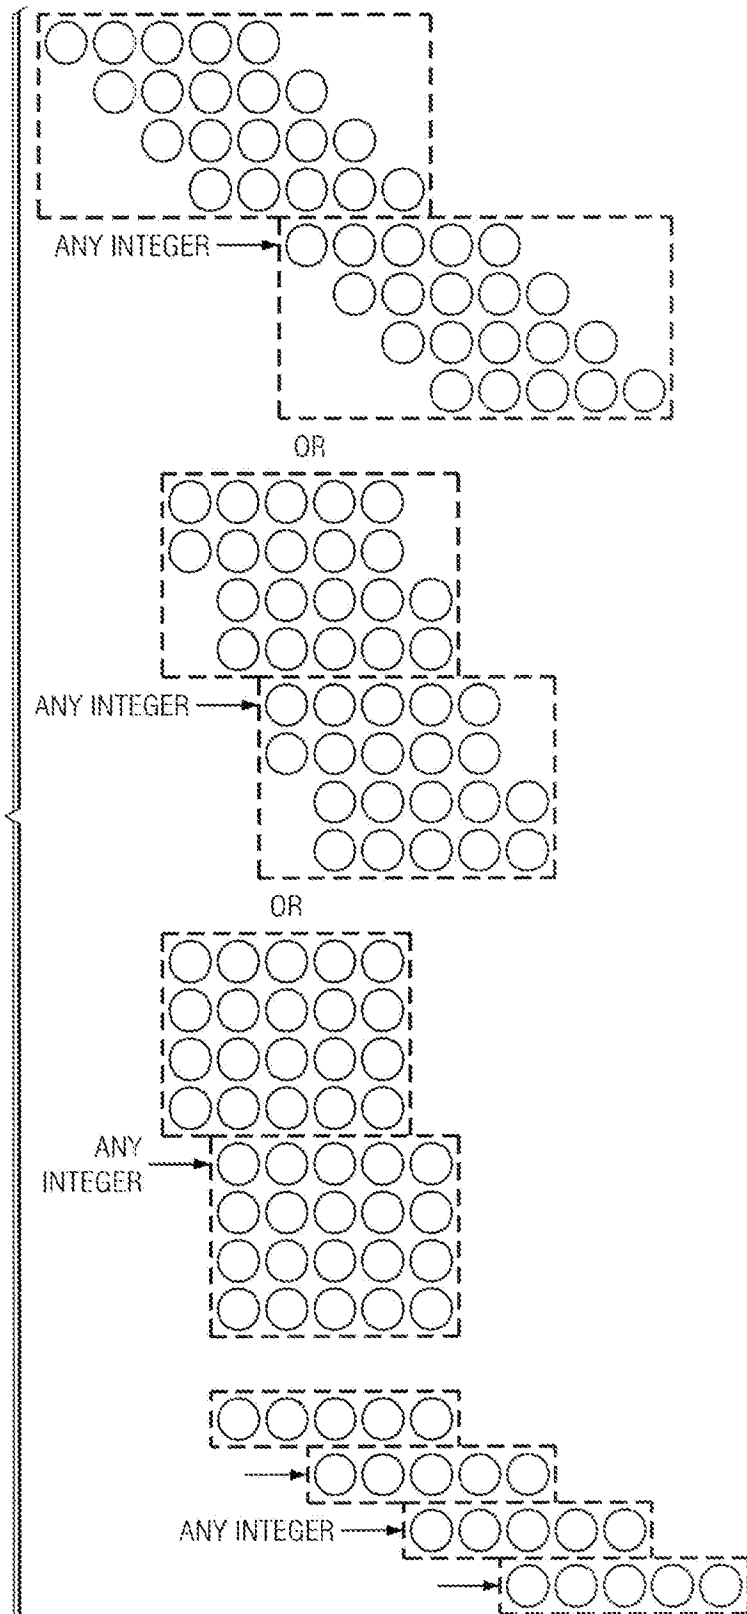

11/15

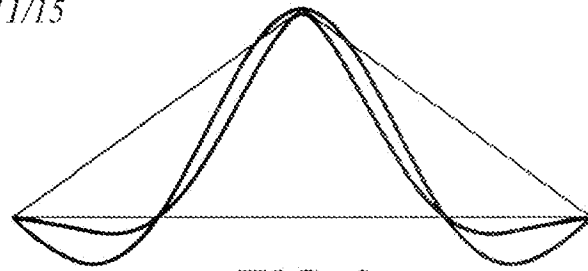


FIG. 9

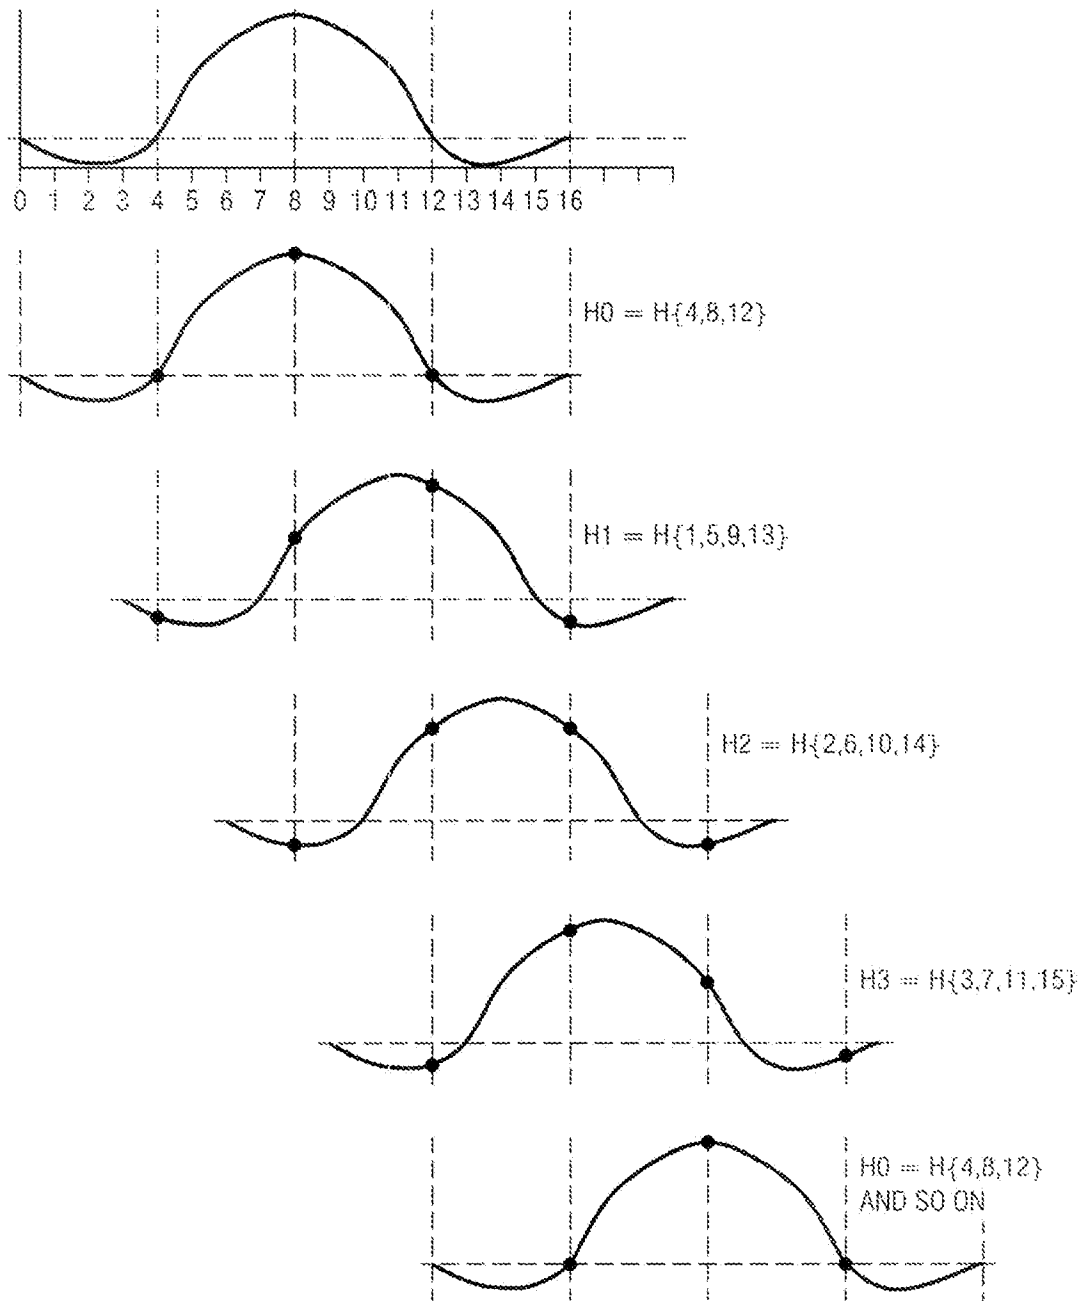
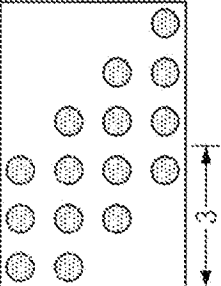
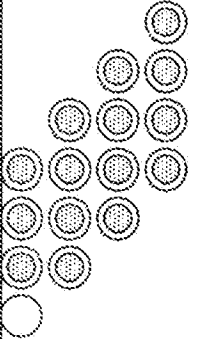
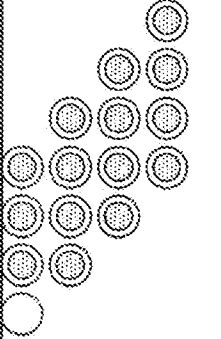
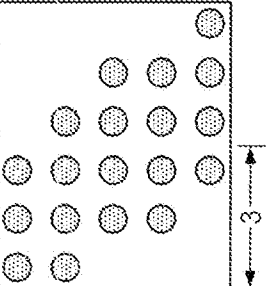
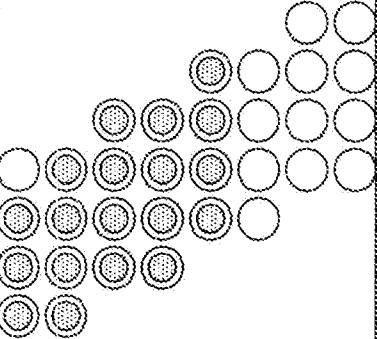
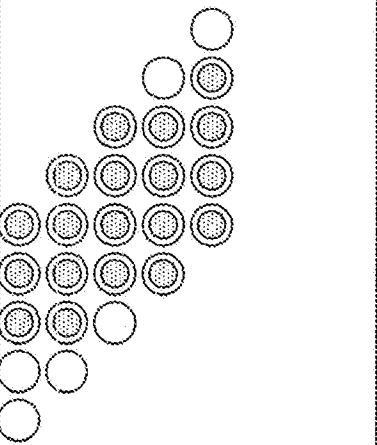





FIG. 10


12/15

RESAMPLING FACTOR	DATA ACCESS PATTERN	HORIZONTAL PASS COVERAGE CHART	VERTICAL PASS COVERAGE CHART
$4/3$			
$5/3$			
$6/3 = 2$			


TO FIG. 12b

FIG. 12a

13/15

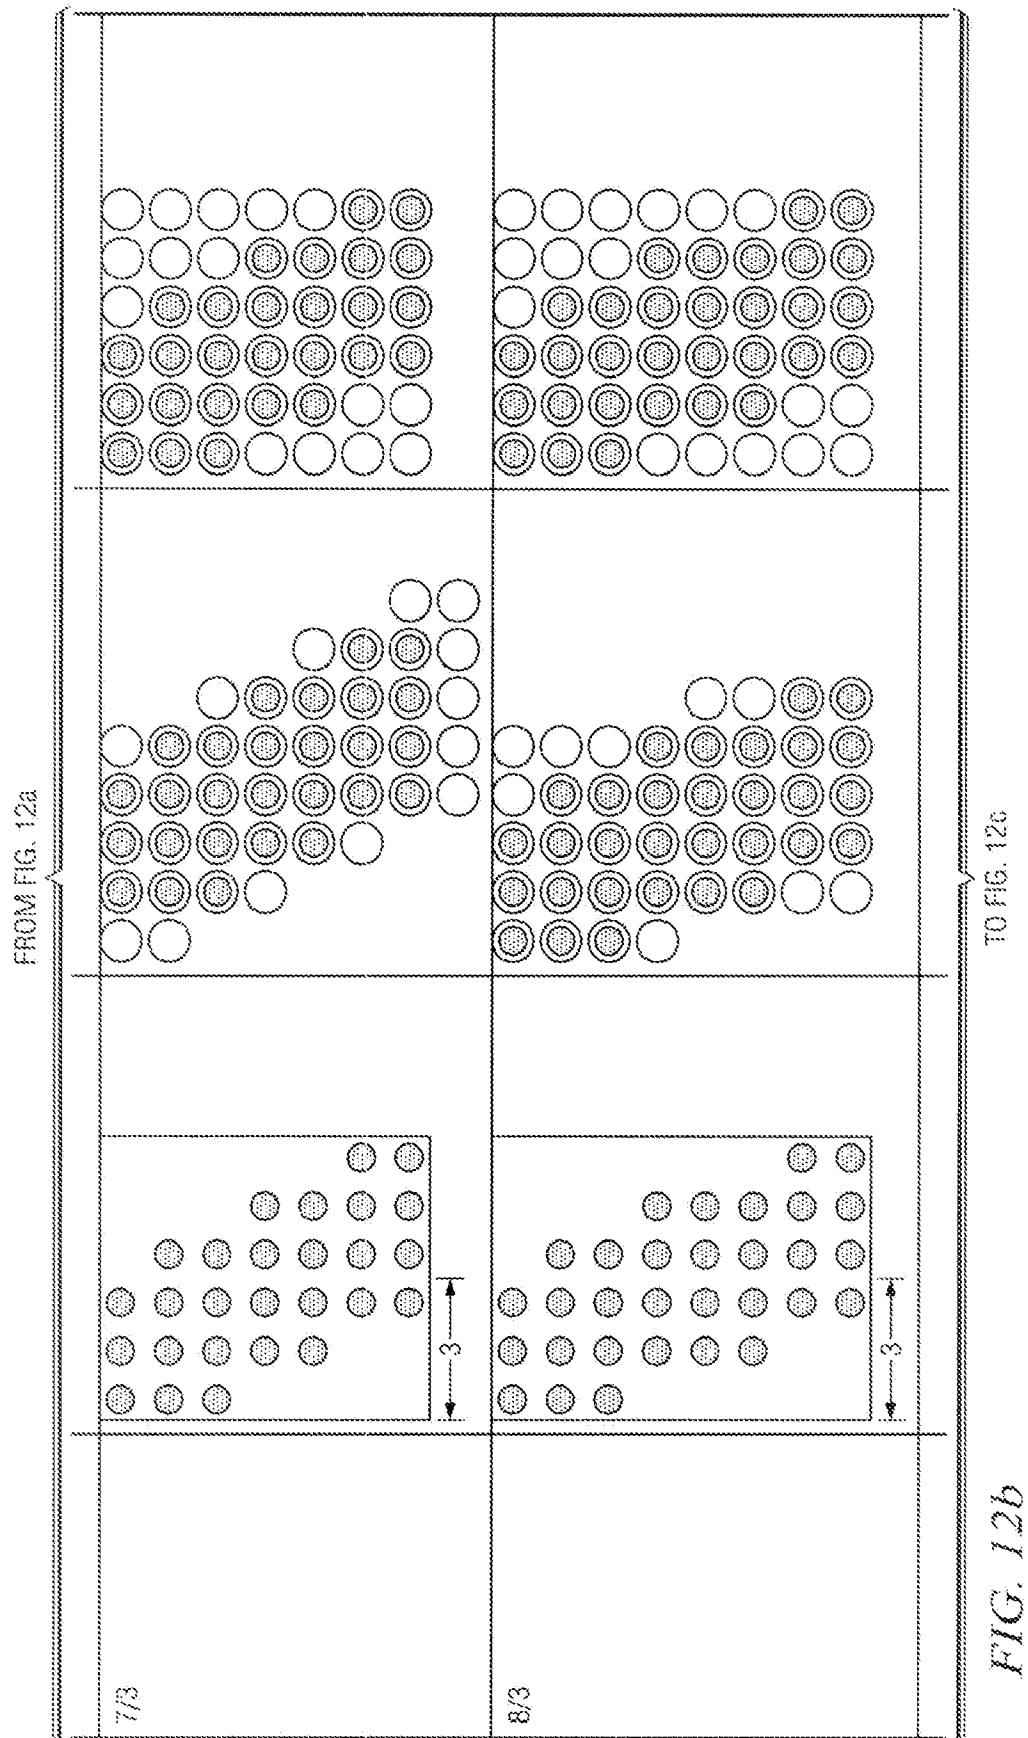

14/15

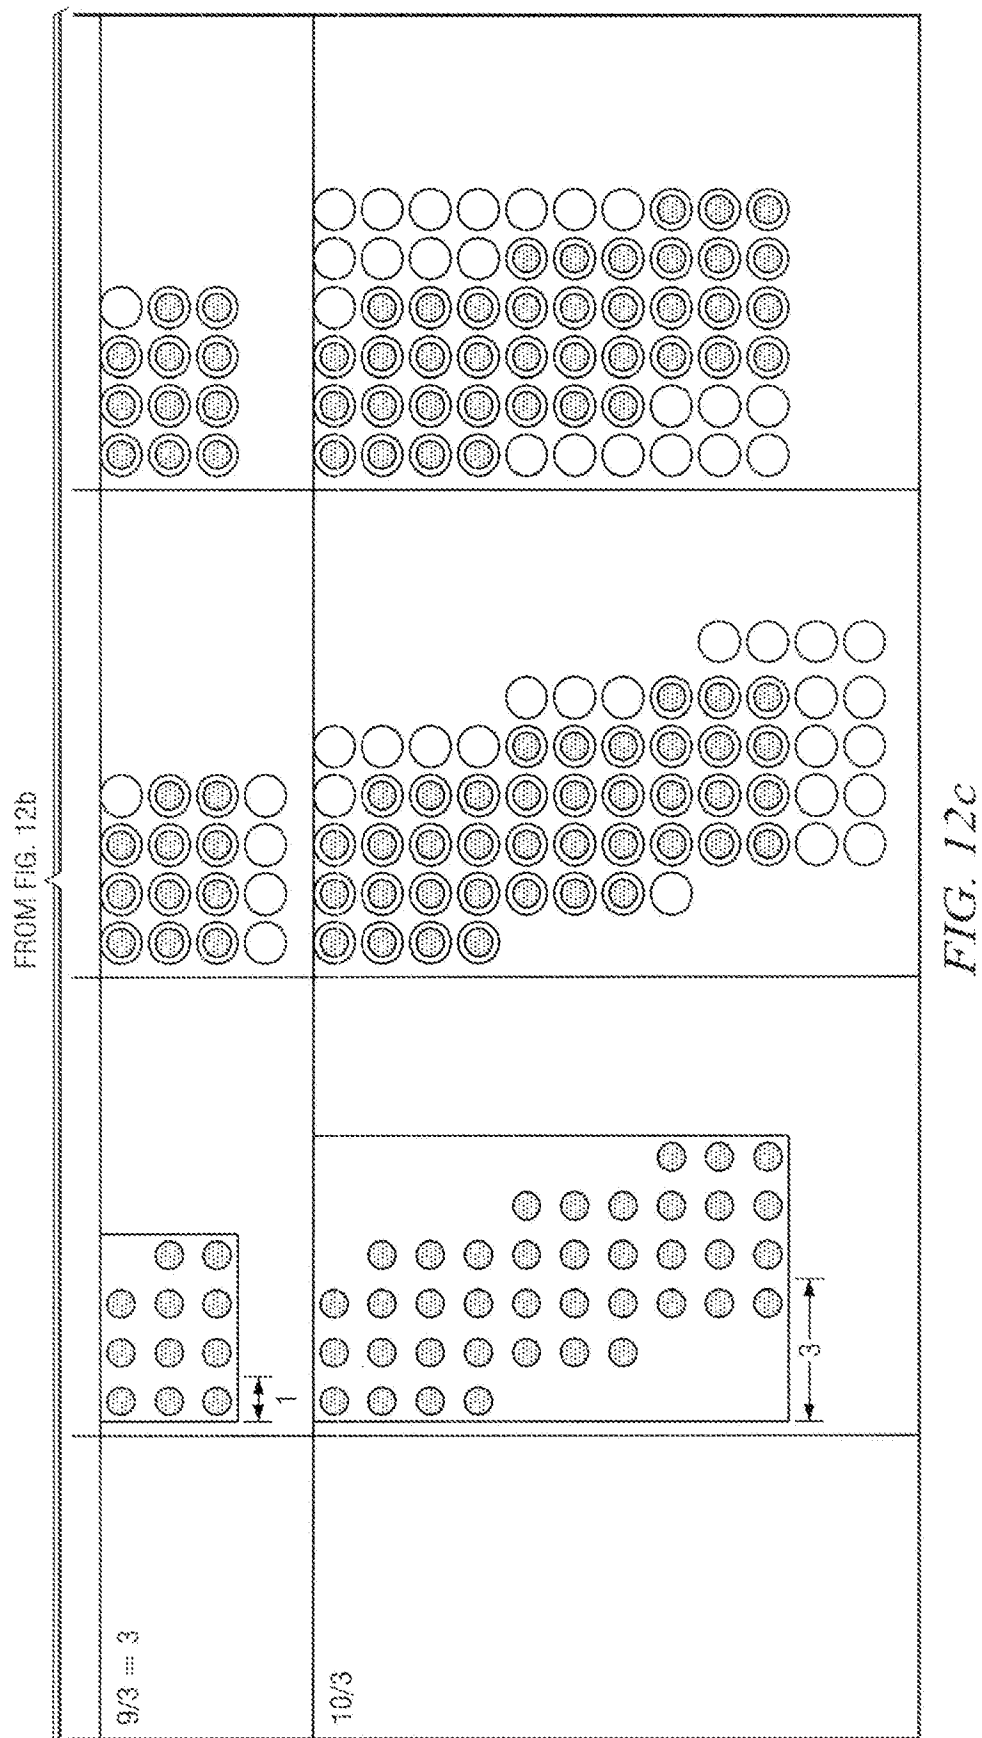

15/15

RESAMPLING FACTOR	Multiply_Factor	H_Arch_Kernel	FILTER TAPS	DATA STEP TO NEXT GROUP OF OUTPUTS	STARTING ACCESS DATA POINT
4/3 HORIZONTAL	1	1:1 SLOPE 4 OUTS	4	N/A	-2
VERTICAL			4	1	-2
5/3 HORIZONTAL	1	2:1 SLOPE 4 OUTS	4	2	-1
VERTICAL			5	1	-3
2/1 HORIZONTAL	2	2:1 SLOPE 4 OUTS	4	N/A	-1
VERTICAL			5	0	-1
7/3 HORIZONTAL	1	2:1 SLOPE 4 OUTS	5	2	-2
VERTICAL			6	0	-1
8/3 HORIZONTAL	1	4 TALL	5	1	-1
VERTICAL			6	0	-1
3/1 HORIZONTAL	1	4 TALL	4	N/A	-1
VERTICAL			4	0	-1
10/3 HORIZONTAL	1	4 TALL	5	1	-1
VERTICAL			6	0	-1

FIG. 13